Common mistakes
Basic Design Principles

David Rabinowitz

Common Mistakes

- Repeated often
  - Especially with the inexperienced
- Don't you make them!
- How to recognize the danger signals?

Danger Signals (1)

```
public class Counter {
  public int howManyA(String s) {
    int conut = 0;
    for(int i = 0; i < s.length(); ++i)
      if(s.charAt(i) == 'a')
        ++count;
    return count;
  }
}
```

Is this a class?

Danger Signals (2)

```
Class City extends Place { … }
Class Jerusalem extends City
  implements Capital { … }
Class TelAviv extends City { … }
```

- What is wrong here?

Danger Signals (3)

```
Class Person {
   String getName(); void setName(String
     name);
   int getAge(); void setAge(int age);
   Car getCar(); void setCar(Car car);
}
```

- What do we see ?

Basic Design Principles (abridged)

- The Open Closed Principle
- The Dependency Inversion Principle
- The Interface Segregation Principle
- The Acyclic Dependencies Principle

The Open Closed Principle

- Software entities (classes, modules, functions, etc.) should be open for extension, but closed for modification.
- In the OO way:
  - A class should be open for extension, but closed for modification.
- Existing code should not be changed – new features can be added using inheritance or composition.

Example

```
enum ShapeType
  {circle, square};
struct Shape {
  ShapeType _type;
};
struct Circle {
  ShapeType _type;
  double _radius;
  Point _center;
};
```

```
struct Square {
  ShapeType _type;
  double _side;
  Point _topLeft;
};
void DrawSquare(struct
  Square*)
void DrawCircle(struct
  Circle*);
```

Example (cont.)

```
void DrawAllShapes(struct Shape* list[], int n) {
  int i;
  for (i=0; i<n; i++) {
      struct Shape* s = list[i];
      switch (s->_type) {
            case square:
            DrawSquare((struct Square*)s);
            break;
            case circle:
            DrawCircle((struct Circle*)s);
            break;
      }
  }
}
```

Where is the violation?

Correct Form

```
class Shape {
public:
  virtual void Draw() const = 0;
};
class Square : public Shape {
public:
  virtual void Draw() const;
};
class Circle : public Shape {
pub
  v
};
```

```
void DrawAllShapes(Set<Shape*>& list) {
      for (Iterator<Shape*>i(list); i; i++)
            (*i)->Draw();
```

The Dependency Inversion Principle

A. High level modules should not depend upon low level modules. Both should depend upon abstractions.
B. Abstractions should not depend upon details. Details should depend upon abstractions.

Example

Where is the violation?

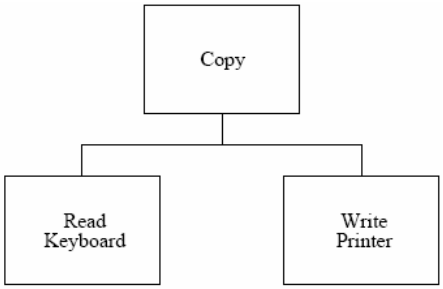


```
void Copy() {
   int c;
   while ((c = ReadKeyboard()) != EOF)
     WritePrinter(c);
}
```

Example (cont.)

- Now we have a second writing device - disk

```
enum OutputDevice {printer, disk};

void Copy(outputDevice dev) {
  int c;
  while ((c = ReadKeyboard()) != EOF)
     if (dev == printer)
          WritePrinter(c);
     else
          WriteDisk(c);
}
```


Correct form

```
class Reader {
  public:
  virtual int Read() = 0;
};
class Writer {
  public:
    virtual void Write(char)=0;
};
void Copy(Reader& r,
          Writer& w) {
  int c;
  while((c=r.Read()) != EOF)
    w.Write(c);
}
```

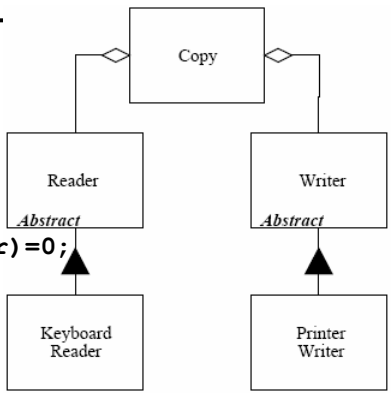

The Interface Segregation Principle

- The dependency of one class to another one should depend on the smallest possible interface.
- Avoid "fat" interfaces

The Interface Segregation Principle

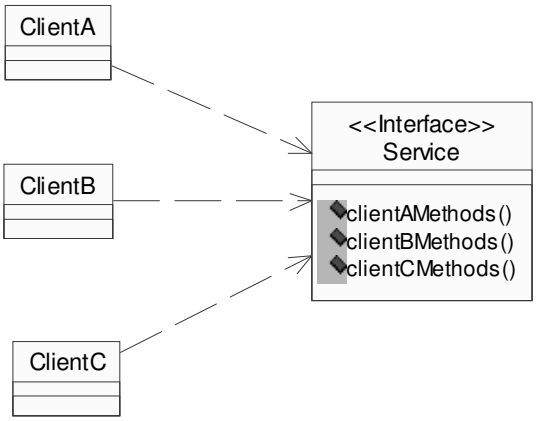

The Interface Segregation Principle

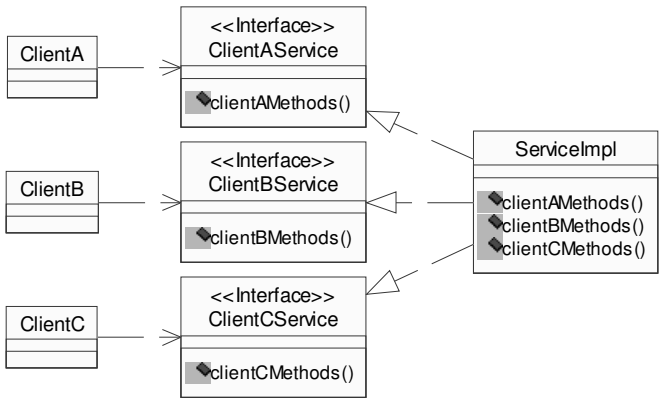

Example

```
class Timer {
  public:
  void Regsiter(int timeout,
       TimerClient* client);
};
```

```
class TimerClient {
  public:
  virtual void TimeOut() = 0;
};
```

```
class Door {
  public:
  virtual void Lock() = 0;
  virtual void Unlock() = 0;
  virtual bool IsDoorOpen() = 0;
};
```

A Timed Door

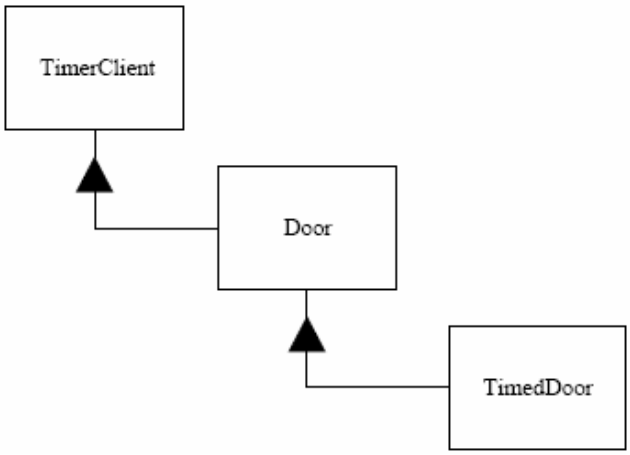

Correct Form

- Two options:

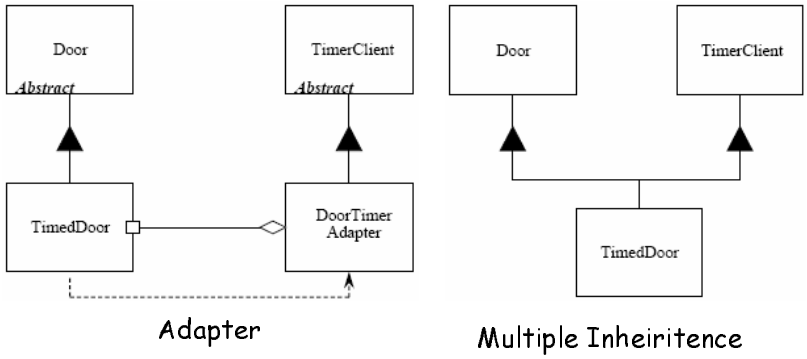

The Acyclic Dependencies Principle

- The dependency structure between packages must not contain cyclic dependencies.

Example

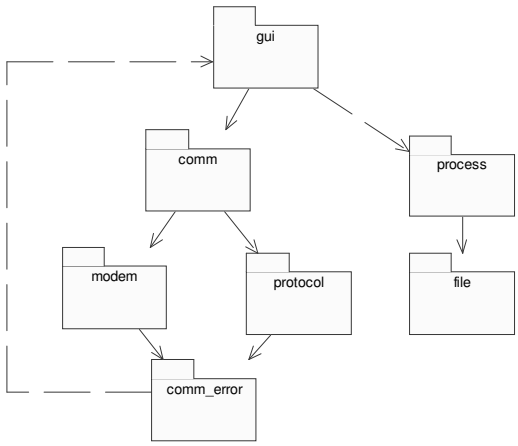

Correct Form

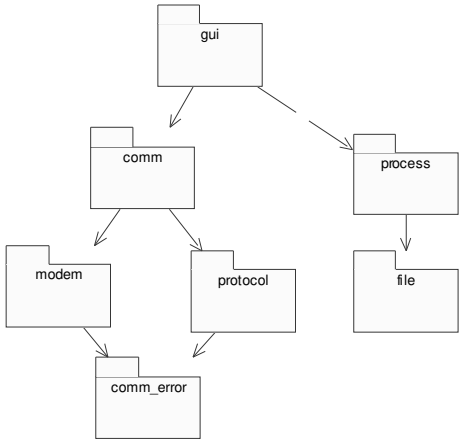

Example 2

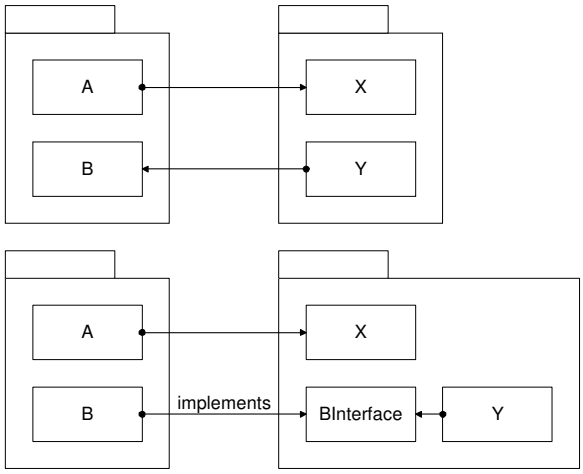

The Law Of Demeter

- Only talk to your immediate friends.
- In other words:
  - You can play with yourself. (`this.method()`)
  - You can play with your own toys (but you can't take them apart). (`field.method(), field.getX()`)
  - You can play with toys that were given to you. (`arg.method()`)
  - And you can play with toys you've made yourself. (`A a = new A(); a.method()`)

Example

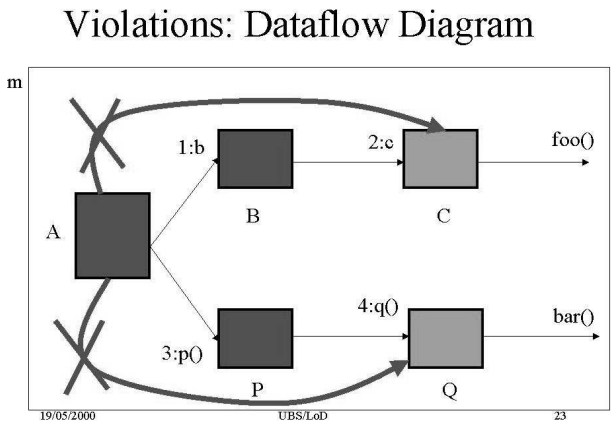

How to correct

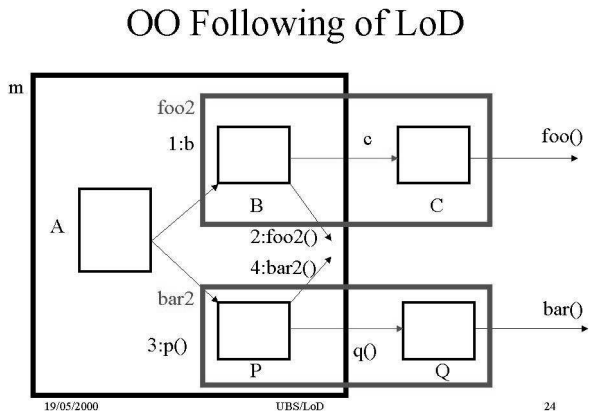

Example Code

The Law of Demeter (cont.)
Violation of the Law

```
class A {public: void m(); P p(); B b; };
class B {public: C c; };
class C {public: void foo(); };
class P {public: Q q(); };
class Q {public: void bar(); };
void A::m() {
   this.b.c.foo(); this.p().q().bar();}
```

19/05/2000 UBS/LoD 22

Resources

- Our resources page
- http://www.objectmentor.com/resources/articleIndex
  - Don't be afraid from "old" articles